


Double shank hook to UNI EN 13001-3-5:2016 (dimensions to DIN 15402) - art. 15402

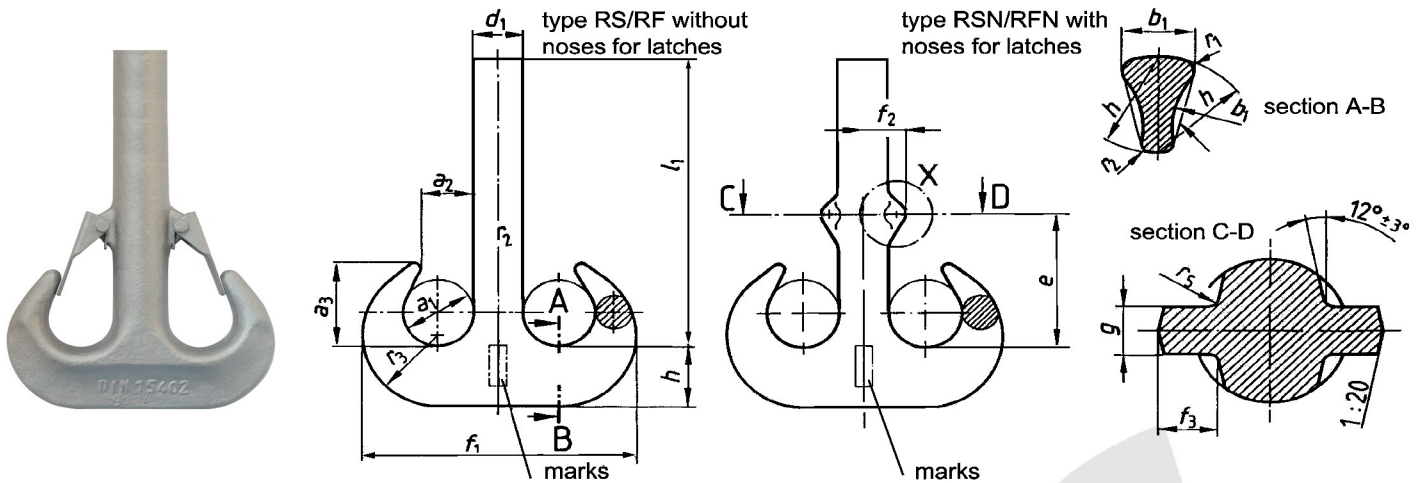

* Reference standard	UNI EN 13001-3-5:2016 (dimensions to DIN 15402 - UNI 9470/1)
* Type of steel	Steel class M, P, S, T, V; stainless steel upon request
* Standard finish	Self-coloured; painted or galvanized upon request
* Applications	Lifting hook in industrial or marine block, in special lifting device
* Safety latch	Spring safety latches; gravity latches upon request
* Capacity	Varying depending on tensile class of steel and FEM class of crane
* Machining	Blank (unmachined) or machined according to DIN, UNI norms, or to customer's specifications
* Notes	Non-standard longer shank lengths available upon request

size	Technical data																	appr. kg/pc.
	measures mm																	
	a_1	a_2	a_3	b_1	d_1	e	f_1	f_2	f_3	g	h	l_1	r_1	r_2	r_3	r_4	r_5	
05	34	27	44	22	24	80	130	20	12	10	27	165	3	3	36	6	1,6	1,9
08	38	30	49	26	30	83	150	22	12	10,5	33	183	4	3	41	6	1,6	2,6
1	40	32	52	28	30	96	158	22	14	12	36	195	4	3,5	44	7	1,6	3,8
1.6	45	36	59	34	36	100	183	28	14	12,5	43	222	5	4	51	7	1,6	5,3
2.5	50	40	65	40	42	112	208	30	14	14	50	250	6	4,5	58	7	1,6	6,9
4	56	45	73	48	48	124	238	33	23	16	60	280	7	5,5	67	10	2,5	9,7
5	63	50	82	53	53	143	266	40	23	16	67	312	8	6,5	75	10	2,5	13,4
6	71	56	92	60	60	160	301	44	23	18	75	375	9	7	85	10	2,5	16,8
8	80	63	103	67	67	182	337	48	23	18	85	415	10	8	95	10	2,5	25,3
10	90	71	116	75	75	192	377	54	27	23	95	450	11	9	106	12	3	36,3
12	100	80	130	85	85	210	421	60	27	23	106	510	12,5	10	118	12	3	50,5
16	112	90	146	95	95	237	471	69	36	28	118	580	14	11	132	16	4	71,1
20	125	100	163	106	106	265	531	75	36	33	132	650	16	12,5	150	16	4	99,5
25	140	112	182	118	118	315	598	86	45	33	150	715	18	14	170	20	5	138
32	160	125	205	132	132	335	672	94	45	38	170	790	20	16	190	20	5	197
40	180	140	230	150	150	375	754	104	45	38	190	885	22	18	212	2	5	286
50	200	160	260	170	170	420	842	120	56	42	212	965	25	20	236	25	6	394
63	224	180	292	190	190	460	944	131	56	42	236	1090	28	22	265	25	6	547
80	250	200	325	212	212	515	1062	144	56	45	265	1235	32	25	300	25	6	759
100	280	224	364	236	236	575	1186	157	56	45	300	1375	36	28	335	25	6	1060
125	315	250	408	265	265	645	1330	178	68	50	335	1550	40	32	375	30	8	1491
160	355	280	458	300	300	725	1505	198	68	50	375	1745	45	36	425	30	8	2115
200	400	315	515	335	335	800	1685	218	68	55	425	1998	50	40	475	30	8	3015
250	450	355	580	375	375	875	1885	240	68	55	475	2250	56	45	530	30	8	4268