


Quick release hook - art. 2503

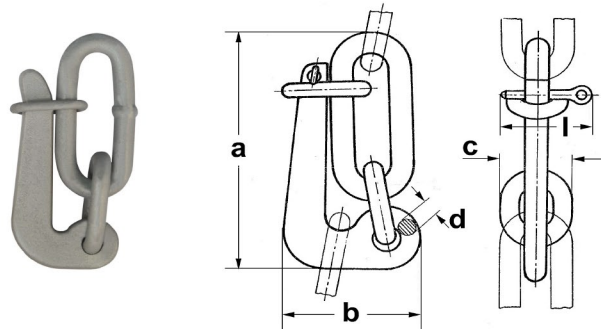

* Reference standard	UNI 2503 (UNAV 4208)
* Type of steel	Carbon steel class P
* Design factor (F.O.S.)	4 : 1
* Standard surface finish	Electro galvanized - stainless steel art. 2503/I available
* Applications	Applications, mainly marine, in which a quick release of hook is requested
* Warnings	They don't open under load

Dimensional tolerances

The dimensional tolerances on forged components according to UNI EN 10243-1 apply

Technical data

code	nominal size d	WLL t*	measures mm				weight per pc. approx. kg
			height a	width b	width c	length l	
T-FVSC08	8	0,25	102	56	28	34	0,224
T-FVSC10	10	0,4	126	66	35	40	0,422
T-FVSC12	12	0,63	151	80	42	50	0,722
FVSC00750**	-	0,75	127	50	32	-	0,298
FVSC01000**	-	1	148	75	44	-	0,605
T-FVSC16	16	1	196	107	56	58	1,76
T-FVSC20	20	1,6	244	132	70	70	3,22
T-FVSC25	25	2,5	304	166	88	90	6,51
T-FVSC32	32	4	389	213	122	120	13,8

* metric tons of 1.000 kg

** sizes not according to UNI 2503 standard, available till stocks last

The sizes in bold character are stock-items.