


## Stainless steel grade 5 (P) swivel hook with safety latch art. 3220/I

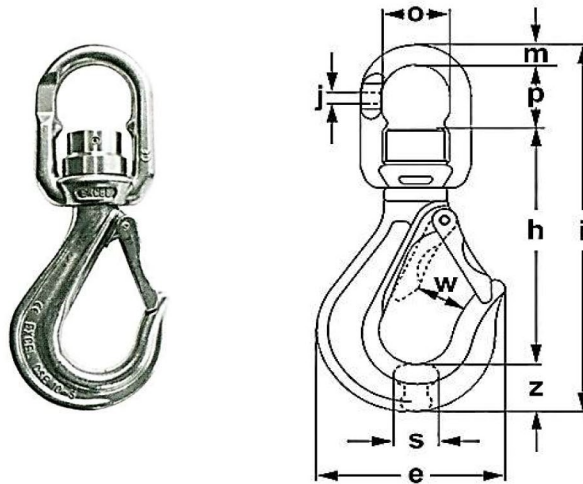

* Standard reference	Industrial standard
* Type of steel	Aisi 316 L (X2CrNiMo18-14-3) stainless steel - W.N. 1.4435
* Design factor (F.O.S.)	4 : 1
* Finish	Polished
* Technical features	High resistance to corrosion
* Applications	Component of stainless steel chain or steel wire rope sling for lifting or towing of loads in corrosive environment (salt water, presence of acid), where it is prescribed the use of stainless steel components (pharmaceutical, food industry), cruisers, leisure boats
* Warnings	Working temperature -50° to +200° C - please refer to the technical part of stainless steel section for deepening and other warnings
* Notes	With flat part for use with omega links

Technical data														
code	WLL t <sup>(1)</sup>	for slings diameter			dimensions mm									approx. weight per pc. kg
		rope mm	chain mm	chain inch	width		height			thickness				
					o	w	h	p	i	s	z	m	j	
<b>AIGGS0006</b>	0,7	6 + 7 + 8	6	1/4	32	27	100	33	164	15	19	12	6	0,55
<b>AIGGS0008</b>	1,2	10	7 + 8	9/32 + 5/16	37	30	126	39	200	20	22	14	8	1
<b>AIGGS0010</b>	1,6	12	10	3/8	48	33	159	47	250	24	29	16	11	1,9
<b>AIGGS0013</b>	2,7	14 + 16	13	1/2	58	36	189	59	307	32	39	21	14	3,42
<sup>(1)</sup> metric tons of 1.000 kg					The codes in bold characters are stock item									